


The **Wing Family**  
Real Game Changer  
in Room Acoustics



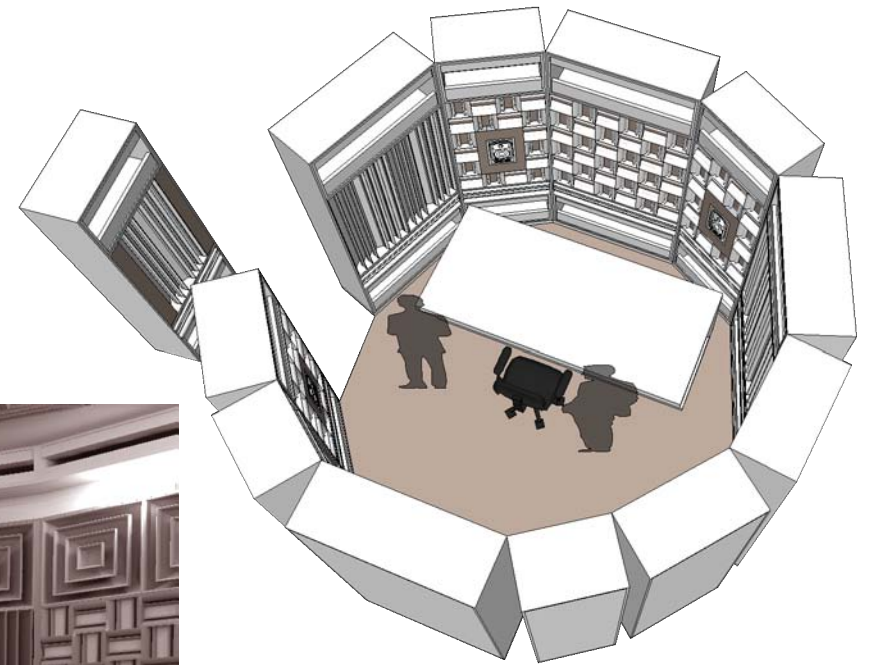

**V-Wing** std 1200\*600\*250mm (1D)

Time delay lines working between 200-16000Hz  
Absorption coefficient 0.12- 0.24 (200-16000Hz)


Helmholtz function created between the modules 125-200Hz  
Std folio finish\* = white, black, oak and walnut



**S-wing MDF** std 1200\*600\*180mm (1D)

Time delay lines working between 250-16000 Hz  
Absorption coefficient 0.12--0.2 (250-16000Hz)


Std folio finish\* = white, black, oak and walnut

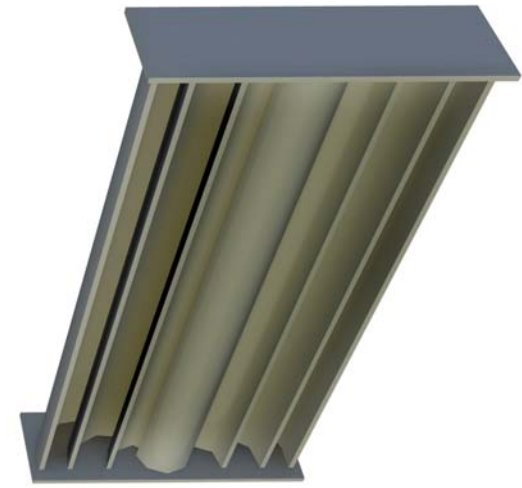

**S-wing Paper** std 1200\*600\*180mm (1D)

Time delay lines working between 350-16000Hz  
Absorption coefficient 0.16-0.33 (350-16000Hz)

Helmholtz and Panel absorber between 40-350Hz  
Std finish = black and white reinforced paper  
Easy to assemble, comes in a Flat-packed kit

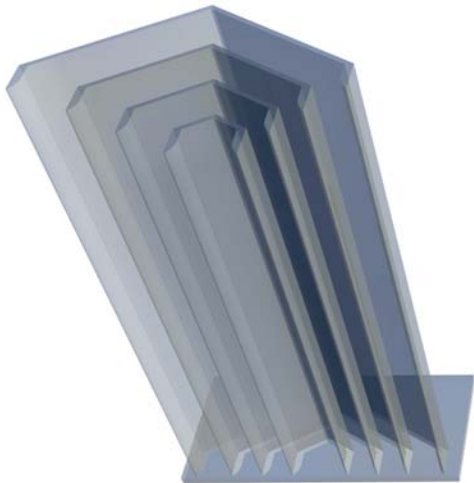

**Transparent Wing mobile**

std 1480\*650\*300mm (1D)

Time delay lines working between 200-16000Hz  
Absorption coefficient 0.1- 0.22 (200-16000Hz)

Helmholtz and panel absorber 80-200Hz




**S-wing Acrylic**

std 800\*600\*165mm (1D)

Time delay lines working between 250-16000 Hz  
Absorption coefficient 0.12--0.2 (250-16000Hz)

Std folio finish\* = white, black, oak and walnut

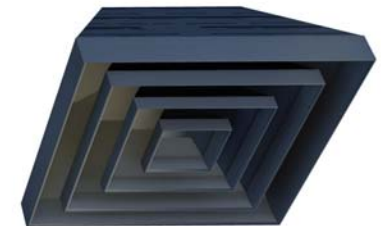

**Flower Wing**

std 600\*600\*250mm (2D)

Time delay lines working between 200-16000Hz  
Absorption coefficient 0.1-0.25 (200-16000Hz)

Helmholtz function created between the modules 200-250Hz  
Std folio finish\* = white, black, oak and walnut

\*Finish options  
Veneer and a variety of other folio colors